




Cotton Strapping Tools A-19



BT-19R

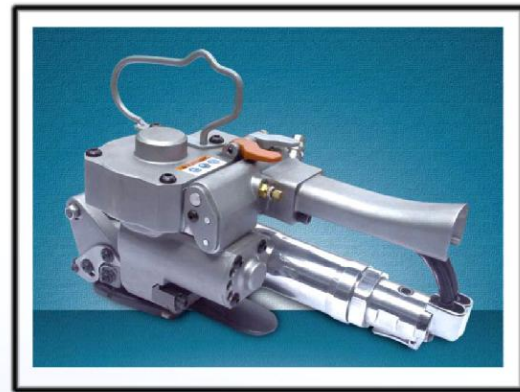

OUPACK-19

Pneumatic tool is applicable to neutral packing and widely used in the export enterprises of iron, textile, household, electrical appliance, stone material and chemical fiber. It finishes the soldering of the PET tape at high speed in one step.

Features:

- 1) Straining, sticking and cutting pneumatically
- 2) Driven by the pneumatic motor with low noises and malfunction rate
- 3) Don't need power and safe to operate
- 4) Light weight for portable use or hanging
- 5) Excellent tighten strength
- 6) Suitable for the packing of steel and timber



A-19

A-19 Cotton Strapping Tools

Detailed Selling Lead Description

Product Name: Pneumatic Packer

Place of Origin: China

Pneumatic packer is applicable for neutral packaging, and is widely used in the export enterprises of iron, textile, household electric appliance, foodstuff and daily merchandise. It adopts PET tape to finish a scrap in a height speed once.

This PET tape is of high tension, environmental protection and no-pollution, and can be used to replace steel tape.

Model	A-19	A-25
Max strap tension	Max. 2800 N (at 0.65 Mpa)	Max. 3000 N (at 0.70 Mpa)
Air pressure	0.5-0.8Mpa	0.6-0.8Mpa
Tool weight	2.2kg	2.5kg
Overall Length	280mm	280mm
Tool width	160mm	160mm
Tool height	180mm	180mm
Strap material	Polyester	Polyester
Strap width	13-19mm	13-25mm
Strap thickness	Heavy gauge 0.5-1.2mm	Heavy gauge 0.5-1.2mm
Sealing tape	Frictional heat welding	Frictional heat welding

**OUPACK-19**

Pneumatic PET strap packaging machine

Detailed Selling Lead Description

Product Name: Pneumatic Packer

Place of Origin: China

Pneumatic packer is applicable for neutral packaging, and is widely used in the export enterprises of iron, textile, household electric appliance, foodstuff and daily merchandise. It adopts PET tape to finish a scrap in a height speed once.

This PET tape is of high tension, environmental protection and no-pollution, and can be used to replace steel tape.

Model	OUPACK-19	OUPACK-25
Max strap tension	Max. 2800 N (at 0.65 Mpa)	Max. 3000 N (at 0.70 Mpa)
Air pressure	0.5-0.8Mpa	0.6-0.8Mpa
Tool weight	3.8kg	4.0kg
Overall Length	280mm	280mm
Tool width	160mm	160mm
Tool height	180mm	180mm
Strap material	Polyester	Polyester
Strap width	13-19mm	13-25mm
Strap thickness	Heavy gauge 0.5-1.2mm	Heavy gauge 0.5-1.2mm
Sealing tape	Frictional heat welding	Frictional heat welding



Pneumatic PET strap packaging machine

Detailed Selling Lead Description

Product Name: Pneumatic Packer

Place of Origin: China

Pneumatic packer is applicable for neutral packaging, and is widely used in the export enterprises of iron, textile, household electric appliance, foodstuff and daily merchandise. It adopts PET tape to finish a scrap in a height speed once.

This PET tape is of high tension, environmental protection and no-pollution, and can be used to replace steel tape.

Model	BT-19R	BT-25R
Max strap tension	Max. 2800 N (at 0.65 Mpa)	Max. 3000 N (at 0.70 Mpa)
Air pressure	0.5-0.8Mpa	0.6-0.8Mpa
Tool weight	3.8kg	4.0kg
Overall Length	280mm	280mm
Tool width	160mm	160mm
Tool height	180mm	180mm
Strap material	Polyester	Polyester
Strap width	13-19mm	13-25mm
Strap thickness	Heavy gauge 0.5-1.2mm	Heavy gauge 0.5-1.2mm
Sealing tape	Frictional heat welding	Frictional heat welding